



SCREENING


PATENTED
FLAWLESS WEAVE TECHNOLOGY

ESD-COAT
SUPERFINE

FAST
INSTALLATION

ALUMINIUM

Cyclone Aluminium flyscreen has been developed using a patented advanced weave technology to provide consistency and precision never before seen in an aluminium flyscreen mesh. Featuring a premium ESD coating to offer superior toughness and longevity whilst maintaining a fine, crisp finish.

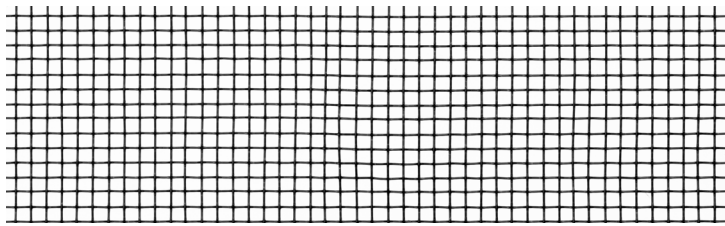

PART #	DESCRIPTION	WIDTH (mm)	LENGTH (m)
30120114	ALUMINIUM 610mm x 30m	610	30
30120121	ALUMINIUM 760mm x 30m	760	30
30120138	ALUMINIUM 810mm x 30m	810	30
30120145	ALUMINIUM 910mm x 30m	910	30
30120152	ALUMINIUM 1070mm x 30m	1070	30
30120169	ALUMINIUM 1220mm x 30m	1220	30
30120176	ALUMINIUM 1520mm x 30m	1520	30

RETAIL RANGE



PART #	DESCRIPTION	WIDTH (mm)	LENGTH (m)
30121944	ALUMINIUM 610mm x 2m	610	2
30122620	ALUMINIUM 910mm x 2m	910	2
30122910	ALUMINIUM 910mm x 4m	910	4
30122637	ALUMINIUM 910mm x 6m	910	6
30122644	ALUMINIUM 910mm x 10m	910	10
30122514	ALUMINIUM 910mm x 30m	910	30
30122651	ALUMINIUM 1220mm x 2m	1220	2
30122927	ALUMINIUM 1220mm x 4m	1220	4
30122668	ALUMINIUM 1220mm x 6m	1220	6
30122675	ALUMINIUM 1220mm x 10m	1220	10
30122521	ALUMINIUM 1220mm x 30m	1220	30

KEY BENEFITS:

- Perfect weave – patented weave technology provides flawless finish, reducing scrap
- Premium quality super-fine ESD-coating with even coverage and deep blackness
- Good rigidity for a clean flat finish with no waves or dents
- Cut edge increases productivity

APPLICATIONS:

- Residential windows and doors



PROTECTION



VISIBILITY



AIRFLOW



STRENGTH

MATERIAL:	5154 Aluminium
WEAVE (strands/inch)	18 x 15
STRAND DIAMETER (mm)	0.25
APERTURE (mm)	1.16 x 1.44
OPENNESS	70%
WEIGHT (gsm)	180
TENSILE STRENGTH (N/20mm)	220
ELONGATION (%)	5



BAL-29: Complies with AS 3959-2018
Resistance against increasing levels of ember attack, with increasing heat flux.