



SCREENING


CLASS 3
CORROSION RESISTANT

CLEAR VIEW
ENHANCED VISIBILITY

FAST
INSTALLATION

EMBER GUARD™

Cyclone Ember Guard™ is the smart solution for Australian bushfire-prone regions, rated up to BAL-FZ compliance. If your property is located in a bushfire zone that requires BAL compliance Ember Guard™ can provide you with piece of mind and help protect your home from ember attack, radiant heat, and direct flame ignition.

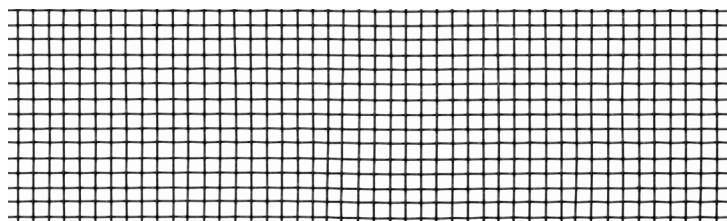

PART #	DESCRIPTION	WIDTH (mm)	LENGTH (m)
30123573	EMBER GUARD 1220mm x 30m	1220	30
30123566	EMBER GUARD 910mm x 30m	910	30

RETAIL RANGE



PART #	DESCRIPTION	WIDTH (mm)	LENGTH (m)
30121883	EMBER GUARD 1220mm x 2m	1220	2
30121890	EMBER GUARD 1220mm x 6m	1220	6
30121852	EMBER GUARD 910mm x 2m	910	2
30121869	EMBER GUARD 910mm x 6m	910	6

KEY BENEFITS:

- A cost-effective substitute to traditional stainless steel mesh
- Clear view - open weave for enhanced visibility
- Good rigidity for a clean flat finish with no waves or dents
- Premium black powder coat finish
- Class 3 Corrosion resistant

APPLICATIONS:

- Bushfire prone areas
- Residential windows and doors



PROTECTION



VISIBILITY



AIRFLOW



STRENGTH

MATERIAL:	SS304 Stainless Steel
WEAVE (strands/inch)	14 x 14
STRAND DIAMETER (mm)	0.20
APERTURE (mm)	1.59 x 1.59
OPENNESS	77%
WEIGHT (gsm)	390
TENSILE STRENGTH (N/20mm)	720
ELONGATION (%)	23



BAL-FZ:



BAL-FZ: Complies with AS 3959-2018
Resistance against direct exposure to flames from fire front in addition to heat flux and ember attack.