



SCREENING

QUALITY
HIGH WEAVE


UV
STABILISED

FAST
INSTALLATION

FIBREGLASS

Cyclone Fibreglass flyscreen is a popular choice for windows and doors in all areas around the home. It possesses good flexibility and UV resistance, and will not dent, corrode, or stain.

This screen has a matte charcoal protective coating which reduces sun glare and has low heat transfer.

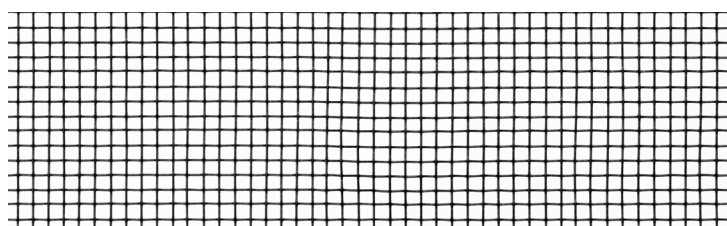

PART #	DESCRIPTION	WIDTH (mm)	LENGTH (m)
529405	FIBREGLASS 1070mm x 50m	1070	50
529504	FIBREGLASS 1220mm x 50m	1220	50
529542	FIBREGLASS 1520mm x 50m	1520	50
529573	FIBREGLASS 1830mm x 50m	1830	50
529214	FIBREGLASS 610mm x 50m	610	50
529306	FIBREGLASS 760mm x 50m	760	50
529344	FIBREGLASS 810mm x 50m	810	50
529382	FIBREGLASS 910mm x 50m	910	50

RETAIL RANGE



PART #	DESCRIPTION	WIDTH (mm)	LENGTH (m)
30122842	FIBREGLASS 1220mm x 6m	1220	6
30122859	FIBREGLASS 1220mm x 10m	1220	10
30122835	FIBREGLASS 1220mm x 2m	1220	2
30122866	FIBREGLASS 1220mm x 30m	1220	30
30121913	FIBREGLASS 610mm x 2m	610	2
30121920	FIBREGLASS 610mm x 6m	610	6
830122811	FIBREGLASS 910mm x 10m	910	10
30122798	FIBREGLASS 910mm x 2m	910	2
30122828	FIBREGLASS 910mm x 30m	910	30
30122804	FIBREGLASS 910mm x 6m	910	6

KEY BENEFITS:

- Matte charcoal finish reduces sun glare
- Supple, pliable fabric is relaxed and easy to work
- Holds firm tension in the frame
- High weave quality with good consistency
- UV stabilised for increased longevity

APPLICATIONS:

- Residential windows and doors



PROTECTION



VISIBILITY



AIRFLOW



STRENGTH

MATERIAL:	PVC Coated Fibreglass Yarn
WEAVE (strands/inch)	18 x 14
STRAND DIAMETER (mm)	0.25
APERTURE (mm)	1.16 x 1.56
OPENNESS	71%
WEIGHT (gsm)	112
TENSILE STRENGTH (N/20mm)	200
ELONGATION (%)	≤3