



SCREENING

CLASS 4
CORROSION RESISTANT


THICK
STRAND DIAMETER

FAST
INSTALLATION

STAINLESS 316

Cyclone Stainless 316 provides strength and durability without sacrificing visibility or airflow. Ideal for coastal areas, this premium marine grade stainless steel, offers exceptional strength and corrosion resistance.

Cyclone 316 Stainless flyscreen also carries a BAL-FZ rating making it ideal for bushfire-prone areas.

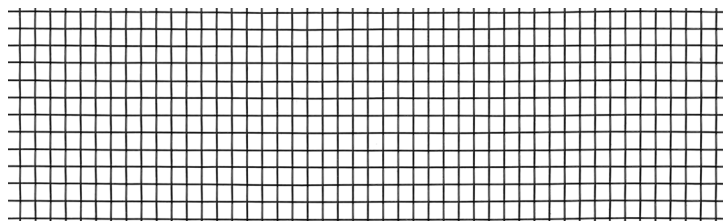

| PART # | DESCRIPTION | WIDTH (mm) | LENGTH (m) |
|--------|------------------------------|------------|------------|
| 505058 | STAINLESS STEEL 1220mm x 30m | 1220 | 30 |
| 505072 | STAINLESS STEEL 1520mm x 30m | 1520 | 30 |
| 505010 | STAINLESS STEEL 610mm x 30m | 610 | 30 |
| 505027 | STAINLESS STEEL 760mm x 30m | 760 | 30 |
| 505034 | STAINLESS STEEL 810mm x 30m | 810 | 30 |
| 505041 | STAINLESS STEEL 910mm x 30m | 910 | 30 |

RETAIL RANGE



| PART # | DESCRIPTION | WIDTH (mm) | LENGTH (m) |
|----------|-----------------------------|------------|------------|
| 30121982 | STAINLESS STEEL 1220mm x 2m | 1220 | 2 |
| 30122767 | STAINLESS STEEL 910mm x 2m | 910 | 2 |

KEY BENEFITS:

- Premium black powder coat finish resists tea-staining
- Thicker strand diameter for high strength & durability
- Class 4 corrosion resistant

APPLICATIONS:

- Coastal areas
- Bushfire prone areas
- Heavy industrial zones
- May be suitable for fall protections systems*



PROTECTION



VISIBILITY



AIRFLOW



STRENGTH

| MATERIAL: | SS316 Stainless Steel |
|---------------------------|------------------------------|
| WEAVE (strands/inch) | 18 x 16 |
| STRAND DIAMETER (mm) | 0.19 |
| APERTURE (mm) | 1.21 x 1.39 |
| OPENNESS | 75% |
| WEIGHT (gsm) | 300 |
| TENSILE STRENGTH (N/20mm) | 750 |
| ELONGATION (%) | 30 |

*Consult your fabricator for complete fall protection systems



BAL-FZ:



BAL-FZ: Complies with AS 3959-2018
Resistance against direct exposure to flames from fire front in addition to heat flux and ember attack.